


Quiz Summary

Section Filter ▾

Student Analysis

Item Analysis

Ⓜ Average Score	⤴ High Score	⤵ Low Score	Ⓢ Standard Deviation	⌚ Average Time
92%	100%	76%	3.37	32:43

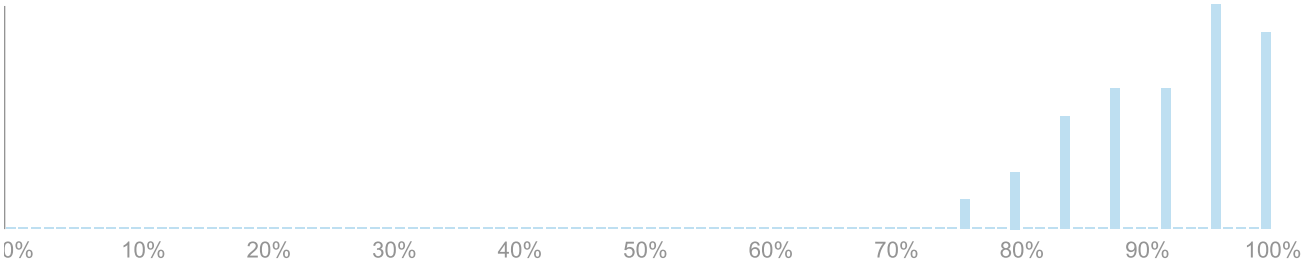

Question Breakdown

Attempts: 32 out of 32

Regarding acoustics and healthcare, considerations should include meeting standards such as HIPAA regulations.

+0.38

Discrimination Index ⓘ

True

30 respondents

94 %

✓

False 2 6 %
respondents

94%
answered
correctly

Attempts: 32 out of 32

Regarding acoustics and healthcare, considerations should include supporting patient well-being and privacy.

-0

Discrimination
Index ?

True 32 100 %
respondents

False 0 %

✓ 100%
answered
correctly

Attempts: 32 out of 32

As part of the Health Insurance Portability & Accountability Act (HIPAA) initiated by the U.S. Department of Health and Human Services (DHHS), the federal government requires pharmacies and healthcare providers in the United States to provide privacy for patient health information (e.g., medication, symptoms, health conditions) in electronic, written, and oral formats.

-0

Discrimination
Index ?

True 32 100 %

✓

respondents

False

0 %

100%
answered
correctly

Attempts: 32 out of 32

Due to HIPAA requirements, many patient areas in healthcare facilities require a confidential level of speech privacy.

-0Discrimination
Index ?**True**32
respondents**100 %**✓ 100%
answered
correctly

False

0 %

Attempts: 32 out of 32

Asbestos is a safe and effective component of many interior products and should be specified and installed in healthcare facilities today.

-0Discrimination
Index ?

True

0 %

100%
answered
correctly**False**32
respondents**100 %**

Attempts: 32 out of 32

The word, "brick" means a masonry unit that can be held in one hand.

+0.27

Discrimination
Index 

True	28 respondents	88 %	✓ 88% answered correctly
False	4 respondents	13 %	

Attempts: 32 out of 32

Formaldehyde is a safe compound and its use can ensure good IAQ in healthcare facilities.

+0.53

Discrimination
Index 

True	2 respondents	6 %	94% answered correctly
False	30 respondents	94 %	✓

Attempts: 32 out of 32

Ancient Romans used bricks in the first century to construct many types of buildings.

-0Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Regarding Class (STC) Ratings, higher numbers indicate greater ability to reduce transmitted sound through an assembly.

-0Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Metal frame construction consists of wood partition assemblies which are installed using 2x4 or 2x6 nominal dimension lumber.

+0.45Discrimination
Index (?)

True	11 respondents	34 %
------	-------------------	------

False 21 respondents 66 % ✓ 66% answered correctly

Attempts: 32 out of 32

Fire treated lumber is chemically coated lumber used for concealed framed areas where a Class A/Class 1 construction rating is required by code.

+0.55

Discrimination
Index (?)

True	28 respondents	88 %	✓ 88% answered correctly
False	4 respondents	13 %	

Attempts: 32 out of 32

Polished granite, tile and marble are relatively lightweight.

+0.16

Discrimination
Index (?)

True	4 respondents	13 %	88% answered correctly
False	28 respondents	88 %	✓

Attempts: 32 out of 32

Stone, ceramic tile and concrete surfaces radiate heat at night that was also absorbed during the night.

+0.54

Discrimination
Index ?

True	15 respondents	47 %	53% answered correctly
False	17 respondents	53 %	✓

Attempts: 32 out of 32

Wall assemblies **cannot** incorporate mechanical, electrical or plumbing systems.

+0.07

Discrimination
Index ?

True	2 respondents	6 %	94% answered correctly
False	30 respondents	94 %	✓

Attempts: 32 out of 32

Vertical wood stud spacing is conventionally laid out at 16 inches on center.

-0Discrimination
Index ?

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

The materials selected for an interior can **never** have an impact on the health of building occupants.

+0.46Discrimination
Index ?

True	8 respondents	25 %	75% answered correctly
False	24 respondents	75 %	✓

Attempts: 32 out of 32

For Ceramic tile, ANSI A 137.1 helps designers identify which tile specification is best regarding intended use and water absorption rates.

+0.6Discrimination
Index ?

True	27	84 %	✓
-------------	----	------	---

	respondents		84%
False	5	16 %	answered
	respondents		correctly

Attempts: 32 out of 32

Regarding fabric wrapped panels, building codes will determine minimum allowable flame and smoke ratings of fabric.

-0

Discrimination
Index ?

True	32	100 %	✓ 100%
	respondents		answered
False		0 %	correctly

Attempts: 32 out of 32

Regarding fabric wrapped panels, they are manufactured in a wide range of sizes and are appropriate for acoustical control .

-0

Discrimination
Index ?

True	32	100 %	✓ 100%
	respondents		answered
False		0 %	correctly

Attempts: 32 out of 32

Glazing includes both glass and framing members used in construction of building and building envelope.

+0.35Discrimination
Index (?)

True	27 respondents	84 %	✓ 84% answered correctly
False	5 respondents	16 %	

Attempts: 32 out of 32

Ceilings are the primary building assembly in which the following systems are incorporated: fire suppression; lighting; security; HVAC and MEP.

-0Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Open ceilings **cannot** be acoustically problematic and do **not** require the design of other material assemblies to provide sound absorption.

+0.3Discrimination
Index (?)

True	2 respondents	6 %	94% answered
False	30 respondents	94 %	✓ correctly

Attempts: 32 out of 32

Type X gypsum wallboard must **not** be specified for fire-rated ceilings.**+0.1**Discrimination
Index (?)

True	1 respondents	3 %	97% answered
False	31 respondents	97 %	✓ correctly

Attempts: 32 out of 32

The most common suspended ceiling system is the lay-in system and its installation involves panels which are laid on top of an exposed T-shaped grid.

-0Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Ceramic ceiling tiles are created from clay and other naturally occurring raw materials; are fireproof and can last for hundreds of years, thereby reducing the need for frequent replacement and consumption of raw materials.

-0

Discrimination
Index ⓘ

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	