


Quiz Summary

Section Filter ▾

Student Analysis

Item Analysis

Ⓜ Average Score	⤴ High Score	⤵ Low Score	Ⓢ Standard Deviation	⌚ Average Time
89%	99%	70%	3.57	01:20:75

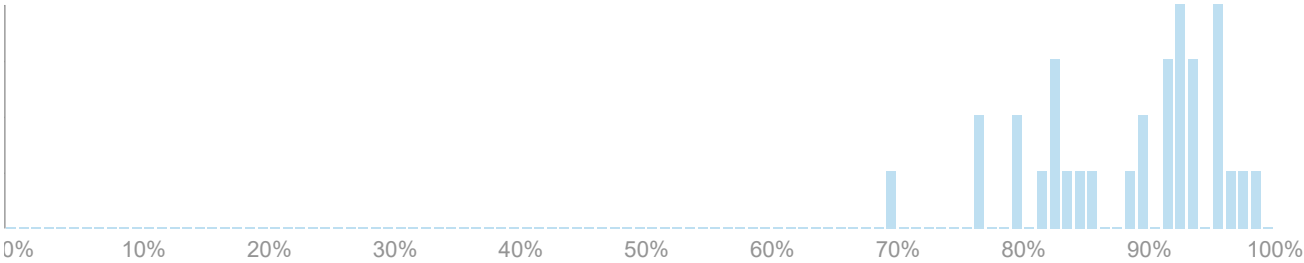

Question Breakdown

Attempts: 32 out of 32

Sick Building Syndrome can result from the buildup of toxic vapors produced by off-gassing of certain building materials.

-0.2

Discrimination Index ⓘ

True

29 respondents

91 %

✓

False	3 respondents	9 %	91% answered correctly
-------	------------------	-----	------------------------------

Attempts: 32 out of 32

VOCs cannot be released into the atmosphere from any painted materials.

+0.3

Discrimination
Index (?)

True	1 respondents	3 %	97% answered correctly
False	31 respondents	97 %	

Attempts: 32 out of 32

USGBC as a certification program for buildings and communities.

+0.36

Discrimination
Index (?)

True	27 respondents	84 %	84% answered correctly
False	5 respondents	16 %	

Attempts: 32 out of 32

For speech privacy, the ceiling's exposed material must be highly absorptive.

-0

Discrimination
Index ?

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Flame and smoke spread ratings indicate how quickly a flame will spread along a material's surface and how much smoke is generated as it burns.

-0

Discrimination
Index ?

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

The direct exposure of humans' skin to very hot flames, generated by a burning material, is the most frequent cause of death as a result of a building fire.

+0.05Discrimination
Index (?)

True	2 respondents	6 %	94% answered correctly
False	30 respondents	94 %	✓

Attempts: 32 out of 32

Dense materials, such as metals, tend to conduct heat away from the human body resulting in a sensation of **warmness** to the touch.

+0.36Discrimination
Index (?)

True	10 respondents	31 %	69% answered correctly
False	22 respondents	69 %	✓

Attempts: 32 out of 32

Class A materials are **quicker** than Class B and C materials to spread flame and smoke.

+0.31Discrimination
Index (?)

True	6 respondents	19 %	81% answered
False	26 respondents	81 %	✓ correctly

Attempts: 32 out of 32

The Modulus of Elasticity describes the relationship between stress and strain when a solid body is subjected to external force.

-0

Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered
False		0 %	correctly

Attempts: 32 out of 32

The proper specification of materials and finishes by interior designers contributes to the health, safety and welfare of building end-users.

-0

Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered
False		0 %	correctly

Attempts: 32 out of 32

Performance is one of the most critical measures to quantify when making decisions regarding the selection of a material.

+0.48

Discrimination
Index (?)

True	31 respondents	97 %	✓ 97% answered correctly
False	1 respondents	3 %	

Attempts: 32 out of 32

In 1973, the EPA banned asbestos in building materials.

+0.65

Discrimination
Index (?)

True	25 respondents	78 %	✓ 78% answered correctly
False	7 respondents	22 %	

Attempts: 32 out of 32

Ramps must normally not exceed a maximum slope of 1:12.

+0.22Discrimination
Index (?)

True	29 respondents	91 %	✓ 91% answered correctly
False	3 respondents	9 %	

Attempts: 32 out of 32

+0.58Monumental Stairs are a legal means of egress. Discrimination
Index (?)

True	6 respondents	19 %	81% answered correctly
False	26 respondents	81 %	✓

Attempts: 32 out of 32

+0.18Nylon is a carbon-based fiber. Discrimination
Index (?)

True	28 respondents	88 %	✓ 88% answered correctly
False	4 respondents	13 %	

Attempts: 32 out of 32

According to the USGBC, LEED credits regarding the avoidance of PVC
may make decisionmakers use materials that are better for human

health.

-0

Discrimination
Index (?)

True	32 respondents	100 %	✓100% answered correctly
False		0 %	

Attempts: 32 out of 32

PVC floor coverings produce toxic fumes when burned.

-0

Discrimination
Index (?)

True	32 respondents	100 %	✓100% answered correctly
False		0 %	

Attempts: 32 out of 32

PVC was one of the worst materials for human health hazards.

+0.15

Discrimination
Index (?)

True	31 respondents	97 %	✓
------	-------------------	------	---

False 1
respondents

3 %

97%
answered
correctly

Attempts: 32 out of 32

Vinyl composite tiles may contain recycled postindustrial vinyl content and recycled limestone filler.

-0.13

Discrimination
Index ?

True 31
respondents

97 %

✓ 97%
answered
correctly

False 1
respondents

3 %

Attempts: 32 out of 32

Slip-retardant vinyl sheet goods, such as Altro's Marine 20 series of high-performance safety flooring, have a highly textured surface and meet the current slip resistance static coefficient of friction guidelines of ADAAG and OSHA.

-0

Discrimination
Index ?

True 32
respondents

100 %

✓

False

0 %

100%
answered
correctly

Attempts: 32 out of 32

The total life cycle cost of maintaining a terrazzo floor is low.

+0.45

Discrimination
Index (?)

True	25 respondents	78 %	✓ 78% answered correctly
False	7 respondents	22 %	

Attempts: 32 out of 32

Granite will range from \$7.00 to \$14.00 per square foot.

+0.51

Discrimination
Index (?)

True	21 respondents	66 %	✓ 66% answered correctly
False	11 respondents	34 %	

Attempts: 32 out of 32

Textured vinyl flooring, with raised dots or squares for stair treads, risers and landings are slip-resistant and aid the visually impaired.

-0

Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Slip-retardant sheet goods are not recommended for behind bars and food counters.

+0.08

Discrimination
Index (?)

True	4 respondents	13 %	88% answered correctly
False	28 respondents	88 %	✓

Attempts: 32 out of 32

-0

In general, stone floors are easy to maintain. Discrimination
Index (?)

True	32 respondents	100 %	✓
False		0 %	

100%
answered
correctly

Attempts: 32 out of 32

Stone's **poor** thermal storage capacity makes it **poorly** suited for application in underfloor radiant heating systems.

+0.31

Discrimination
Index 

True	3 respondents	9 %	91% answered correctly
False	29 respondents	91 %	

Attempts: 32 out of 32

The origin of a stone's extraction is an important consideration because transportation from the quarry to fabricators, distributors and project sites requires the consumption of a significant amount of fossil fuel.

-0

Discrimination
Index 

True	32 respondents	100 %	 100% answered correctly
False		0 %	

Attempts: 32 out of 32

ASTM C1028-07 is the standard test method for determining the static coefficient of friction of stone.

+0.25

Discrimination
Index (?)

True	29 respondents	91 %	✓ 91% answered correctly
False	3 respondents	9 %	

Attempts: 32 out of 32

It is environmentally **irresponsible** to source regionally extracted and locally prepared stone.

+0.32

Discrimination
Index (?)

True	4 respondents	13 %	88% answered correctly
False	28 respondents	88 %	✓

Attempts: 32 out of 32

Due to the excellent thermal storage capacity of natural stone, it is a material well suited for surfaces applications in underfloor radiant heating

systems.

-0.02

Discrimination
Index (?)

True	30 respondents	94 %	✓ 94% answered correctly
False	2 respondents	6 %	

Attempts: 32 out of 32

Thin-set installation methods are **not** the common method for installing stone tile flooring.

+0.37

Discrimination
Index (?)

True	4 respondents	13 %	88% answered correctly
False	28 respondents	88 %	✓

Attempts: 32 out of 32

Sanded grout is used for flooring and unsanded grout is used for wall applications.

+0.38

Discrimination
Index ?

True	30 respondents	94 %	✓ 94% answered correctly
False	2 respondents	6 %	

Attempts: 32 out of 32

-0.1

Luxury vinyl tile is easy to maintain. Discrimination
Index ?

True	31 respondents	97 %	✓ 97% answered correctly
False	1 respondents	3 %	

Attempts: 32 out of 32

ASTM F1700-04 is the standard specification for all classifications of
solid vinyl floor tiles.

-0

Discrimination
Index ?

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Class 1 indicates monolithic tiles. **+0.28**

Discrimination
Index (?)

True	28 respondents	88 %	✓ 88% answered correctly
False	4 respondents	13 %	

Attempts: 32 out of 32

Linoleum is a composite of natural plant-based material containing linseed oil, cork dust, wood flour, tree rosins, ground limestone and pigments.

-0

Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Harvesting the raw materials for linoleum consumes relatively low energy.

+0.36

Discrimination
Index (?)

True	28 respondents	88 %	✓ 88% answered correctly
False	4 respondents	13 %	

Attempts: 32 out of 32

-0.11

Linoleum is antimicrobial. Discrimination
Index (?)

True	30 respondents	94 %	✓ 94% answered correctly
False	2 respondents	6 %	

Attempts: 32 out of 32

No environmental toxins are involved in the manufacturing or disposal of linoleum.

+0.21

Discrimination
Index (?)

True	28 respondents	88 %	✓ 88% answered correctly
False	4 respondents	13 %	

Attempts: 32 out of 32

+0.48

Glass is thermally conductive. Discrimination
Index ?

True	20 respondents	63 %	✓ 63% answered correctly
False	12 respondents	38 %	

Attempts: 32 out of 32

The amount of embodied energy that goes into manufacturing concrete is **insignificant**.

+0.14

Discrimination
Index ?

True	5 respondents	16 %	84% answered correctly
False	27 respondents	84 %	✓

Attempts: 32 out of 32

Properly managed cork forests support biodiversity and some cork manufacturers have received Greenguard Environmental Institute awards for indoor air quality and forest stewardship.

+0.48

Discrimination
Index ?

True	31 respondents	97 %	✓ 97% answered correctly
False	1 respondents	3 %	

Attempts: 32 out of 32

ANSI A137.1 outlines four classifications based on water absorption rate of ceramic tiles

+0.21

Discrimination
Index ?

True	29 respondents	91 %	✓ 91% answered correctly
False	3 respondents	9 %	

Attempts: 32 out of 32

Cementitious top coatings can be poured or pumped onto any properly prepared concrete floor **unless** it is worn, unlevel or damaged.

+0.2

Discrimination
Index ?

True	19 respondents	59 %	✓
------	-------------------	------	---

False 13
respondents

41 %

59%
answered
correctly

Attempts: 32 out of 32

A proprietary specification names a product or material by manufacturer's name and includes a model number or part number.

-0

Discrimination
Index (?)

True 32
respondents

100 %

✓ 100%
answered
correctly

False

0 %

Attempts: 32 out of 32

A descriptive specification does not use a manufacturer's name or trade name but describes materials, workmanship, fabrication methods, and installation of the required goods.

-0.03

Discrimination
Index (?)

True 31
respondents

97 %

✓

False

1

3 %

respondents

97%
answered
correctly

Attempts: 32 out of 32

Noise can affect learning ability in classrooms and productivity of employees in workplaces.

-0

Discrimination
Index ?

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

The more porous a material, the more easily it will absorb sound.

+0.22

Discrimination
Index ?

True	29 respondents	91 %	✓ 91% answered correctly
False	3 respondents	9 %	

Attempts: 32 out of 32

It is common for performance specifications to require that certain tests and methods of testing be done.

-0.2

Discrimination
Index ?

True	31 respondents	97 %	✓ 97% answered correctly
False	1 respondents	3 %	

Attempts: 32 out of 32

+0.12

Fibrous materials are **not** good sound absorbers. Discrimination
Index ?

True	3 respondents	9 %	91% answered correctly
False	29 respondents	91 %	✓

Attempts: 32 out of 32

Noise Reduction Coefficient (NRC) deals with sound absorption in closed plan spaces.

-0Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Ceiling Attenuation Class (CAC) is a measure for rating the performance of a ceiling system as a barrier to airborne sound transmission through a common plenum between adjacent closed spaces.

-0Discrimination
Index (?)

True	29 respondents	91 %	✓ 91% answered correctly
False	3 respondents	9 %	

Attempts: 32 out of 32

+0.18

Paint is typically sold by the **pint**. Discrimination
Index (?)

True	3 respondents	9 %	91% answered correctly
False	29 respondents	91 %	✓

Attempts: 32 out of 32

To determine the number of gallons of paint necessary to cover the walls of a space, one must measure the area of the space and divide by the number of square feet per gallon.

+0.37

Discrimination
Index (?)

True	28 respondents	88 %	✓ 88% answered correctly
False	4 respondents	13 %	

Attempts: 32 out of 32

Regarding wheelchair ramps, to determine the percent of grade, divide the rise by the run of the ramp.

-0.08

Discrimination
Index (?)

True	31 respondents	97 %	✓ 97% answered correctly
False	1 respondents	3 %	

Attempts: 32 out of 32

Regarding wheelchair ramps, Run is always the length of the ramp.

+0.23Discrimination
Index (?)

True	15 respondents	47 %	53% answered correctly
False	17 respondents	53 %	✓

Attempts: 32 out of 32

Life Cycle Cost Analysis determines the long-term costs including design and construction, maintenance and disposing of a building or a building system.

+0.48Discrimination
Index (?)

True	31 respondents	97 %	✓ 97% answered correctly
False	1 respondents	3 %	

Attempts: 32 out of 32

On the Linoleum Material Safety Data Sheet it indicates that persons who are sensitive to odors and/or chemicals should be advised to avoid the work area during the installation process.

+0.14Discrimination
Index (?)

True	30 respondents	94 %	✓ 94% answered correctly
False	2 respondents	6 %	

Attempts: 32 out of 32

Interior designers need to be aware of a product's chemical makeup, sustainability footprint, and performance.

-0Discrimination
Index (?)

True	32 respondents	100 %	✓ 100% answered correctly
False		0 %	

Attempts: 32 out of 32

Interior designers must consider how interior products are installed, maintained, and ultimately disposed.

-0Discrimination
Index (?)

True	32	100 %	✓
------	----	-------	---

respondents

False

0 %

100%
answered
correctlyAttempts: 32 out of 32 **-0**

Specifications

Discrimination
Index (?)**All of the given choices are correct**31
respondents**97 %**

a portion of the contract documents

0 %

written instructions given to the
contractors and vendors1
respondents

3 %

are simply referred to as "specs" by
many in the industry

0 %

97%

answered
correctly

Attempts: 32 out of 32

Health, Safety and Welfare considerations may include

-0Discrimination
Index (?)**All of the choices given are correct**32
respondents**100 %**Local, national or international building
codes

0 %

ADAAG

Spread of flame and smoke

0 %

0 %

100% answered correctly

Attempts: 32 out of 32

+0.4

Thermal transmittance is

Discrimination Index ?

All of the choices given are correct

28 respondents

88 %

the inverse of insulation

1 respondents

3 %

a measure of transferring heat from outside of a building

3 respondents

9 %

a measure of tranferring cold from outside of a building

0 %

88% answered correctly

Attempts: 32 out of 32

+0.32

Carpet tiles

Discrimination Index ?

All of the choices given are correct

30 respondents

94 %

provide the end-user with the possibility of relocating freestanding furniture

1 respondents

3 %

systems and office partitions without
having to patch and seam adjoining
areas of carpet

can be removed and replaced easily
without tools

are most commonly made of nylon

0 %

1
respondents

3 %

94%
answered
correctly

Attempts: 32 out of 32

+0.02

Regarding carpet

Discrimination
Index (?)

All of the choices given are correct

30
respondents

94 %

Directly gluing carpet to subfloors is
typical for installations in non-residential
interiors

1
respondents

3 %

Tufts per square inch equal carpet
density

1
respondents

3 %

Pile height is the actual height in inches
of carpet pile above backing

0 %

94%
answered
correctly

Attempts: 32 out of 32

Regarding asbestos

+0.23

Discrimination
Index (?)

Only certified asbestos abatement contractors may remove VAT	22 respondents	69 %
Existing asbestos flooring must be sanded for safety	1 respondents	3 %
Breathing in asbestos dust cannot cause lung cancer		0 %
None of the choices given are correct	9 respondents	28 %

69%
answered
correctly

Attempts: 32 out of 32

-0

Sound is measured in Discrimination
Index (?)

decibels (dB)	32 respondents	100 %	✓
grams		0 %	
hertz (Hz)		0 %	
milliliters		0 %	

100%
answered
correctly

Attempts: 32 out of 32

+0.26

Regarding Vinyl compositional tiles: Discrimination Index (?)

All of the choices given are correct

26

respondents

81 %

may be used over radiant heat flooring systems.

0 %

using adhesives with zero or low VOCs to install can help further reduce the overall VOC emissions.

1

respondents

3 %

are easy to install and to maintain.

5

respondents

16 %

81%

answered

correctly

Attempts: 32 out of 32

+0.36

Downcycling Discrimination Index (?)

All of the choices given are correct

24

respondents

75 %

is when a material has been recycled into a material of a lower grade.

6

respondents

19 %

is when we reuse a product that has diminished performance characteristics for an alternate purpose

1

respondents

3 %

None of the choices given are correct

1

respondents

3 %

75%
answered
correctly

Attempts: 32 out of 32 **+0.23**

Carpet tiles Discrimination
Index

All of the choices given are correct

31
respondents **97 %**

provide the end-user with the possibility
of relocating freestanding furniture
systems and office partitions without
having to patch and seam adjoining
areas of carpet

0 %

can be removed and replaced easily
without tools

1
respondents

3 %

are most commonly made of nylon

0 %

97%
answered
correctly

Attempts: 32 out of 32 **+0.15**

Regarding carpet Discrimination
Index

All of the choices given are correct

31
respondents **97 %**

Directly gluing carpet to subfloors is
typical for installations in non-residential
interiors

1
respondents

3 %

Tufts per square inch equal carpet density0 %

Pile height is the actual height in inches of carpet pile above backing0 %

97%

answered

correctly

Attempts: 32 out of 32

+0.37

Regarding asbestos

Discrimination Index ?

Only certified asbestos abatement contractors may remove VAT19 respondents59 %

Existing asbestos flooring must be sanded for safety1 respondents3 %

Breathing in asbestos dust cannot cause lung cancer0 %

none of the choices given are correct12 respondents38 %

59%

answered

correctly

Attempts: 31 out of 32

+0.45

Regarding Vinyl compositional tiles:

Discrimination Index ?

All of the choices given are correct24 respondents75 %

may be used over radiant heat flooring systems.	0 %
using adhesives with zero or low VOCs to install can help further reduce the overall VOC emissions.	2 respondents 6 %
are easy to install and to maintain.	5 respondents 16 %
No Answer	1 respondents 3 %

75%
answered
correctly

Attempts: 31 out of 32 **+0.37**

Downcycling

Discrimination
Index ?

All of the choices given are correct	22 respondents	69 %
is when a material has been recycled into a material of a lower grade.	7 respondents	22 %
b. is when we reuse a product that has diminished performance characteristics for an alternate purpose	1 respondents	3 %
None of the choices given are correct	1 respondents	3 %
No Answer	1 respondents	3 %

69%
answered
correctly

Attempts: 31 out of 32

+0.05

Health, Safety and Welfare considrations may include

Discrimination Index ⓘ

All of the choices given are correct	29 respondents	91 %
Local, national or international building codes		0 %
ADAAG	2 respondents	6 %
Spread of flame and smoke		0 %
No Answer	1 respondents	3 %

91% answered correctly

Attempts: 32 out of 32

+0.27

Paint is typically sold by the pint.

Discrimination Index ⓘ

True	2 respondents	6 %	94% answered correctly
False	30 respondents	94 %	

Attempts: 31 out of 32

Ceiling Attenuation Class (CAC) is a measure for rating the performance of a ceiling system as a barrier to airborne sound transmission through a

common plenum between adjacent closed spaces.

+0.09

Discrimination
Index (?)

True	29 respondents	91 %	✓ 91% answered correctly
False	2 respondents	6 %	
No Answer	1 respondents	3 %	

Attempts: 31 out of 32

The direct exposure of humans' skin to very hot flames, generated by a burning material, is the most frequent cause of death as a result of a building fire.

+0.49

Discrimination
Index (?)

True	2 respondents	6 %	✓ 91% answered correctly
False	29 respondents	91 %	
No Answer	1 respondents	3 %	

Attempts: 31 out of 32

It is environmentally **irresponsible** to source regionally extracted and locally prepared stone.

+0.26

Discrimination
Index ?

True	6 respondents	19 %	78% answered correctly
False	25 respondents	78 %	
No Answer	1 respondents	3 %	

Attempts: 32 out of 32 **+0.07**

Anthropometrics Discrimination
Index ?

a science that deals with measurement of the human body	29 respondents	91 %	✓
study of disabilities in children		0 %	
applied science that investigates interaction between built form and actions to perform tasks	2 respondents	6 %	
All of the choices given are correct	1 respondents	3 %	

91%
answered
correctly

Attempts: 32 out of 32

VOCs may cause which of the following **+0.42**

Discrimination
Index (?)

All of the choices given are correct

29
respondents

91 %



allergic reactions

3
respondents

9 %

asthma

0 %

eye irritation

0 %

91%
answered
correctly

Attempts: 32 out of 32

+0.66

Human Factors include

Discrimination
Index (?)

All of the choices given are correct

26
respondents

81 %



Accessible Design

0 %

Proxemics

6
respondents

19 %

None of the choices given are correct

0 %

81%
answered
correctly

Attempts: 32 out of 32

Human Factors include **+0.55**Discrimination
Index (?)

All of the choices given are correct	29 respondents	91 %	✓
proxemics	3 respondents	9 %	
universal design		0 %	
none of the choices given are correct		0 %	
91% answered correctly			

Attempts: 32 out of 32 **+0.4**

LEED

Discrimination
Index (?)

All of the choices given are correct	30 respondents	94 %	✓
is a green building certification system		0 %	
was established by the USGBC		0 %	
stands for Leadership in Energy and Environmental Design	2 respondents	6 %	
94% answered correctly			

Attempts: 31 out of 32

Cradle to Cradle: Remaking the Way We Make Things is associated with

+0.45

Discrimination
Index 

All of the choices given are correct

25
respondents 78 %



Reduce, reuse, recycle and regulate

4
respondents 13 %

William McDonough

1
respondents 3 %

Michael Braungart

1
respondents 3 %

No Answer

1
respondents 3 %

78%
answered
correctly

Attempts: 31 out of 32

To support sustainable design practices, Interior Designers should strive to

+0.19

Discrimination
Index 

decrease interiors' carbon emissions

30
respondents 94 %



increase interiors' carbon emissions

1
respondents 3 %

avoid thinking about carbon emissions	0 %
none of the choices given are correct	0 %
No Answer	1 respondents3 %

94%
answered
correctly

Attempts: 31 out of 32

Fabric and unfinished wood absorb which of the following

+0.22

Discrimination
Index ?

All of the choices given are correct	29 respondents	91 %	✓
moisture	2 respondents	6 %	
oils		0 %	
odor		0 %	
No Answer	1 respondents	3 %	

91%
answered
correctly

Attempts: 32 out of 32

Biomimicry

+0.18Discrimination
Index (?)**refers to designs inspired by nature**31
respondents**97 %**

is not applicable to interior design

0 %

goes against sustainable design
concepts

0 %

All of the choices given are correct

1
respondents

3 %

97%
answered
correctly

Attempts: 32 out of 32

Ceiling treatment is most effective for sound absorption in

-0.12Discrimination
Index (?)**large rooms**20
respondents**63 %**

small rooms

0 %

All of the choices given are correct

12
respondents

38 %

none of the choices given are correct

0 %

63%
answered
correctly

Attempts: 32 out of 32 **+0.28**

Class C materials Discrimination
Index

All of the choices given are correct	25 respondents	78 %
have flame and smoke spread ratings between 76 and 200	5 respondents	16 %
have poor resistance to falme and smoke spread	2 respondents	6 %
none of the choices given are correct		0 %

78%
answered
correctly

Attempts: 30 out of 32 **+0.58**

Patina Discrimination
Index

may be desirable in an interior material	1 respondents	3 %
All of the choices given are correct	22 respondents	69 %
term used to describe a surface condition	3 respondents	9 %
produced by exposure to natural elements such as moisture, air, sunlight,	4 respondents	13 %

age, wear or rubbing

No Answer

2
respondents

6 %

69%
answered
correctly

Attempts: 32 out of 32

-0.08

Inddor Air Quality

Discrimination
Index ?

All of the choices given are correct

1
respondents

3 %

should be a significant Health, Safety
and Welfare concern in the design of
interiors

31
respondents

97 %

is not a consideration for interior
designers

0 %

is a factor which is only applicable to
paint

0 %

97%
answered
correctly

Attempts: 32 out of 32

+0.61

Bamboo

Discrimination
Index ?

All of the choices given are correct

27
respondents

84 %

is a grass		0 %
may be used for flooring	4 respondents	13 %
none of the choices given are correct	1 respondents	3 %

84%
answered
correctly

Attempts: 32 out of 32

+0.2

Old vinyl asbestos tiles are typically

Discrimination Index ?

none of the choices given are correct	22 respondents	69 %
24 inches square	9 respondents	28 %
36 inches square	1 respondents	3 %
22 inches square		0 %

69%
answered
correctly

Attempts: 30 out of 32

+0.2

Regarding Means of Egress Stairs

Discrimination Index ?

are a prominent feature	2 respondents	6 %
-------------------------	------------------	-----

10/2/2020

DHM 3303 FA 2020 Test #2 Materials & Finishes: Statistics

provide orientation	1 respondents	3 %	
provide space organization	4 respondents	13 %	
All of the choices given are correct	23 respondents	72 %	✓
No Answer	2 respondents	6 %	
72% answered correctly			

Attempts: 31 out of 32

-0

Brick	Discrimination Index ?		
All of the choices given are correct	31 respondents	97 %	✓
Fie resistant		0 %	
Slip Resistant		0 %	
Low maintenance		0 %	
No Answer	1 respondents	3 %	
97% answered correctly			

Attempts: 32 out of 32

Brick			
-------	--	--	--

+0.06

Discrimination
Index (?)

All of the choices given are correct	29 respondents	91 %
May be reclaimed		0 %
Fire resistant	2 respondents	6 %
Takes considerable energy to manufacture	1 respondents	3 %
91% answered correctly		

Attempts: 32 out of 32

Reasons to select carpet as a flooring solution include:

-0

Discrimination
Index (?)

hides subfloor imperfections		0 %
acoustical performance		0 %
thermo-insulation		0 %
All of the choices given are correct	32 respondents	100 %

100%
answered
correctly

Attempts: 32 out of 32 **+0.13**

Carpet Discrimination
Index 

All of the choices given are correct	31 respondents	97 %	
cushions falls		0 %	
is thermo-insulating	1 respondents	3 %	
is slip-resistant		0 %	

97%
answered
correctly

Attempts: 32 out of 32 **+0.49**

Carpet Discrimination
Index 

Nylon and Wool can be recycled	2 respondents	6 %	
industry taking steps to reduce waste to landfills		0 %	
Some may be converted into fuel	2 respondents	6 %	
All of the choices given are correct	28 respondents	88 %	

88%
answered
correctly